




BLACK BOX[®]

NETWORK SERVICES

POW-R-BOOT 5

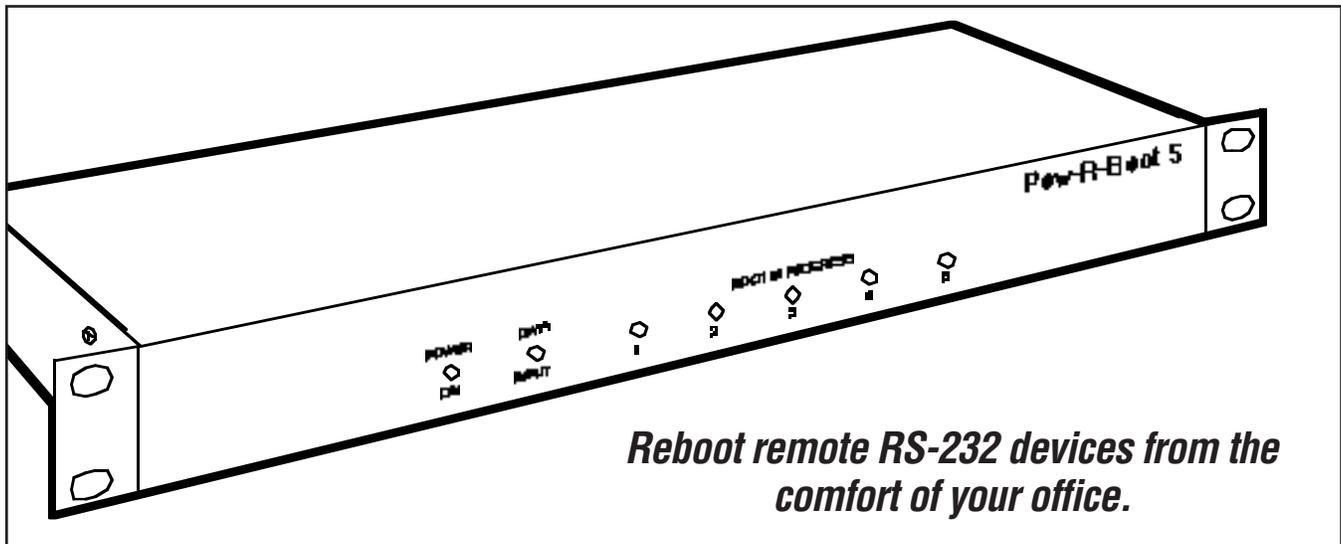

Key Features

- ▶ **RS-232-controlled.**
- ▶ **Activated by an ASCII character string.**
- ▶ **User-programmable password.**
- ▶ **User-programmable plug labels and Site ID.**
- ▶ **Displays plug status (ON/OFF).**
- ▶ **Remotely cycles AC power on 5 outlets.**
- ▶ **Set each plug to On, Off, or Boot (off/on).**

Dial up the Pow-R-Boot 5 and reset the power for any remote RS-232 device that's plugged into one of the Switch's five outlets without leaving your office—or your home.

You can reboot email gateways, communications equipment, satellite equipment, and much more. With your remote command, the AC power cycles off for 2 to 8 seconds and then turns the device back on. You can also take equipment completely off-line by powering that plug "off." The Pow-R-Boot 5's command port reports the status activity, shows plug labels, and current settings.

Because each outlet is controlled individually, you can reset the power for that particular device without disturbing the rest of your network.

Control the Switch two ways—locally with a direct connection to a terminal or PC or remotely via a dialup modem.

And security's not a problem. The Pow-R-Boot 5 features user-programmable password protection and site ID. Password protection guarantees that only authorized users have access to the Pow-R-Boot 5. Site ID names the location of each unit for WAN customers. Another new feature is user-programmable plug labels:

You can attach a name to each outlet to identify the equipment it's attached to.

The Switch is easy to use, too. A short string of characters is all you need to toggle power to an outlet. On your command, the AC power goes OFF for two to eight seconds (user-selectable)—then turns back ON. The Switch's command port gives you status activity, so you know that the reboot was a success.

Installation takes just minutes, too. Plug the Switch into an AC power supply, plug in the RS-232 equipment, and connect the Switch to a modem via a 9-pin PC-to-modem cable. Because the Switch is compact, it fits into a single 19" rack.

Specifications

Switched Outlets —

5 plugs, each
rated at 220 VAC @ 5 amps
max., total power for all plugs
not to exceed 5 amps

each rated at 10 amps max for
U.S. versions; (5) IEC outlets
(Plug ON/OFF) for European
versions only

Indicators — (7) LEDs: (1) Power

On, (1) Data Input, (5) Plug
ON/OFF

Power — 220 VAC, 50 Hz, 15 amps

Size — 4.6H x 48.3W x 16.5D cm
(1.8"H x 19"W x 6.5"D)

Speed — 2400 or 9600 bps,
switch-selectable

Weight — 6 lb. (2.7 kg)

Interface — Serial RS-232 ASCII,
8 bits, no parity

Connectors —

Control: (1) DB9 male;
Power: (5) ground plug outlets

Ordering Information

ITEM

CODE

Pow-R-Boot 5SWI020AE-R2