### **Features**

- 1/16" diameter lug holes.
- Accommodates ¾", 1" and 1¾" center-to-center spaced two-hole lugs.
- Buss Bar is constructed of electrolytic tough pitch 110 alloy copper.
- Insulators are made of glass-reinforced thermoset polyester.
- Provides 2¾" standoff from back board.
- Listed to UL® 467.

### **NOTE**

3/8" wallmounting hardware is not included.

#### TRADEMARKS USED IN THIS MANUAL

UL is a registered trademark of Underwriters Laboratories Incorporated.


Any other trademarks mentioned in this manual are acknowledged to be the property of the trademark owners.

© Copyright 2003. Black Box Corporation. All rights reserved.



SEPTEMBER 2003 RM066 RM067

# 12" Wallmount Buss Bar 20" Wallmount Buss Bar

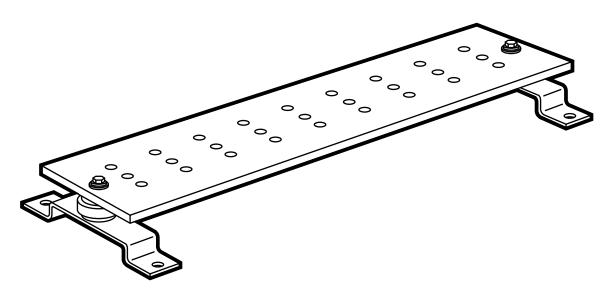

## **Specifications**

Number of Holes: RM066: 15; RM067: 27

Size: RM066: 4"H x 12"W x 2.75"D (10.2 x 30.5 x 7 cm); RM067: 4"H x 20"W x 2.75"D (10.2 x 50.8 x 7 cm)

Weight: RM066: 5 lb. (2.3 kg); RM067: 8 lb. (3.6 kg)

## What the Package Includes

- (1) 1/4" thick Wallmount Buss Bar
- (2) Insulators
- (2) Standoff brackets and hardware

If anything is missing or damaged, please contact Black Box at 724-746-5500.

(continued on the back of this page)